



OSMO SYSTEM FOR VENTILATION CONTROL

**IN CASE OF 230V POWER SUPPLY CUT ,
INDEPENDENT OPERATION FOR UP TO 24 HOURS**



**PROLONG THE LIFETIME OF BATTERIES
IN OSMO LIFTING MOTORS ***

**DC/DC CONVERTER
FOR FACILITIES
WITHOUT ELECTRIC LIGHT 230V
REF.4B10000M**

DESCRIPTION:

Essential in installations without 230 V electrical power and without a 230 V current inverter (with a generator set or solar panels) for the correct maintenance of the battery voltage in OSMO lifting motors. Without DC/DC, batteries are charged incorrectly and gradually lose charging capacity, causing premature wear.


Complies with IP56 protection standard.

TECHNICAL DATA:

Input 12V / Output 16V

Dimensions (length x width x height): 128 x 88 x 58mm

2 cables with 2 wires, L 1.5 m: connection between the backup battery and OSMO regulator *

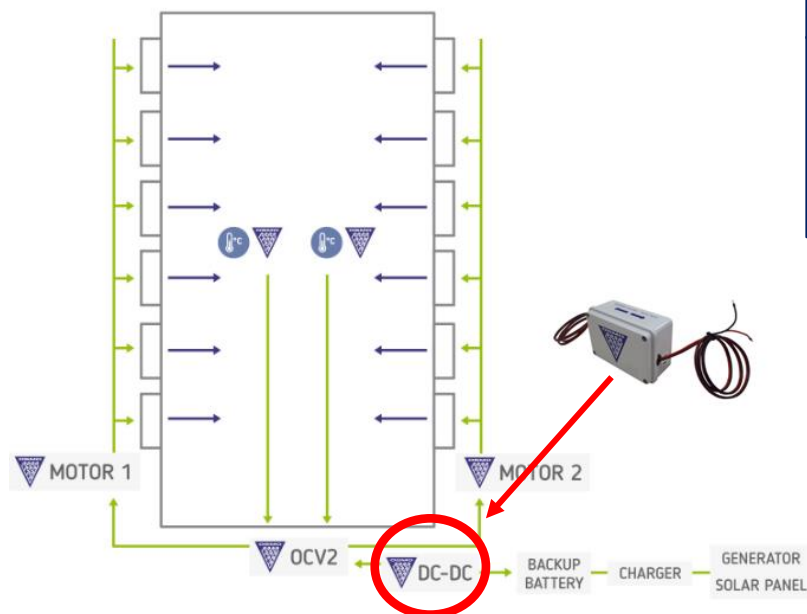

*** EXPLORE OSMO MOTORS, REGULATORS AND ACCESSORIES TO COMPLETE THE VENTILATION SYSTEM**